

TPC WIRE & CABLE CORP.

NEW PRODUCTS

Waterproof Nylon Cable Glands

- UL Listed
- CSA
- IP 68
- CE
- RoHS Compliant



Material:

Nylon, UL 94

Seal & O-Ring:

EPDM

Temperature:

-40°C to 100°C

Color:



Black

FEATURES & BENEFITS

1. Easy handling allows for quick installations
2. Gripping fingers on the washer applies even compression around the grommet
3. Grommet is notched and holds firmly in place
4. Grooved body allows the O-Ring to seat tightly

APPLICATIONS

- Indoor and Outdoor Use
- Control Cabinets
- Instrumentation
- Food Processing Equipment
- Sensor Equipment
- Wind Turbines
- Solar Panels

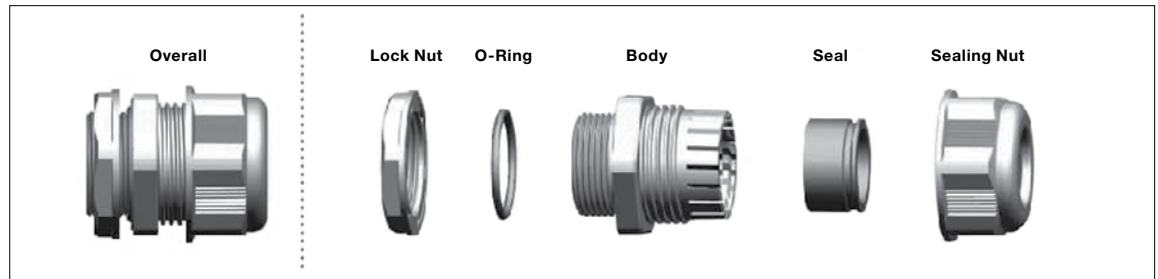



ORDERING INFORMATION (Call for pricing & availability)

NPT THREAD					
PART NO.	THREAD RANGE	CABLE RANGE (in)	H (mm)	GL (mm)	SPANNER SIZE (mm)
N3808B	3/8" NPT	0.16 – 0.31	22	15	22/19
N3806B	3/8" NPT	0.08 – 0.24	22	15	22/19
N12612B	1/2" NPT	0.24 – 0.47	27	13	24
N1209B	1/2" NPT	0.20 – 0.35	27	13	24
N1214B	1/2" NPT	0.39 – 0.55	28	13	27
N3418B	3/4" NPT	0.51 – 0.71	31	14	33
N3416B	3/4" NPT	0.35 – 0.63	31	14	33
N10025B	1" NPT	0.71 – 0.98	39	19	42
N10020B	1" NPT	0.51 – 0.79	39	19	42

Metric sizes on the back →



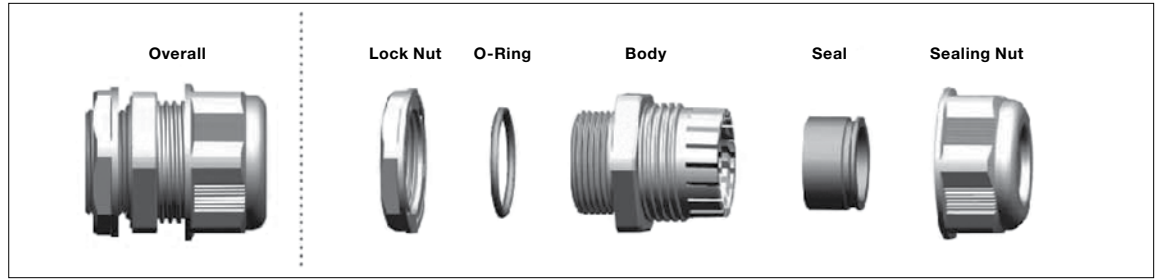

ORDERING INFORMATION *(Call for pricing & availability)*

METRIC THREAD					
PART NO.	THREAD RANGE	CABLE RANGE (mm)	H (mm)	GL (mm)	SPANNER SIZE (mm)
M1207B	M12 x 1,5	3 – 6,5	21	8	15
M1205B	M12 X 1,5	2 – 5	21	8	15
M1608B	M16 x 1,5	4 – 8	22	8	19
M1606B	M16 x 1,5	2 – 6	22	8	19
M2012B	M20 x 1,5	6 – 12	27	9	24
M2009B	M20 x 1,5	5 – 9	27	9	24
M2014B	M20 x 1,5	10 – 14	28	9	27
M2518B	M25 x 1,5	13 – 18	31	11	33
M2516B	M25 x 1,5	9 – 16	31	11	33



TPC WIRE & CABLE CORP.
EXPECT HIGH PERFORMANCE®

TPC WIRE & CABLE CORP. HEADQUARTERS 9600 VALLEY VIEW RD, MACEDONIA, OHIO 44056
 USA 800-521-7935 • FAX 866-528-2930 • CANADA 800-545-0122 • MEXICO 001-877-283-1696
 CHILE 1230-020-0229 • COLOMBIA 0-1-800-915-7519 • PERU 0800-54863 • WWW.TPCWIRE.COM

WARRANTY AND DISCLAIMER: Seller makes no warranties, express or implied, with respect to this product, and seller disclaims any implied warranties of merchantability or fitness for any particular purpose. Further, seller will not be responsible for any consequential, incidental or indirect damages (including, but not limited to, any loss of profit) from any cause whatsoever.

HOF147 (07/14) ©Copyright 2014 by TPC Wire & Cable Corp. All rights reserved. No portion of this publication, whether in whole or in part, can be reproduced without the express written consent of TPC Wire & Cable Corp.

